


## Light'in Carbon 1-1/8" – 1.5"

TAPERED

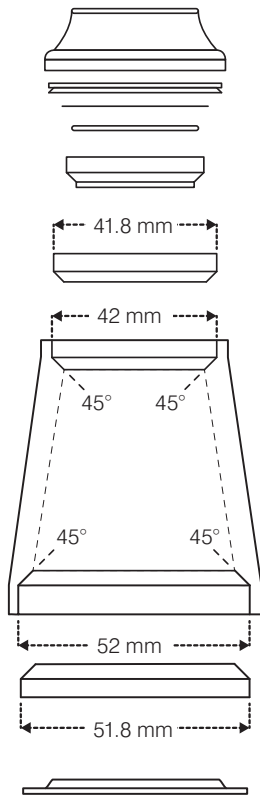


### Specifications

Type	Integrated, Angular contact
Material	7075 CNC Alu Cups, Carbon top Spacer, Alu Top Cap
Upper Steerer Diameter	1 1/8"
Lower Steerer Diameter	1.5"
Upper External Angle	45°
Frame Inside Upper Diameter	42 mm (+/- 0.1 mm)
Lower External Angle	45°
Frame Inside Lower Diameter	52 mm (+/- 0.1 mm)
Bearings	Annular
Stack Height	16,8 mm
SHIS Code	IS42/28,6   IS52/40"
Color	Carbon
Weight	90 g
Item no.	252765

## Light'in Carbon 1-1/8" – 1-1/4"


TAPERED

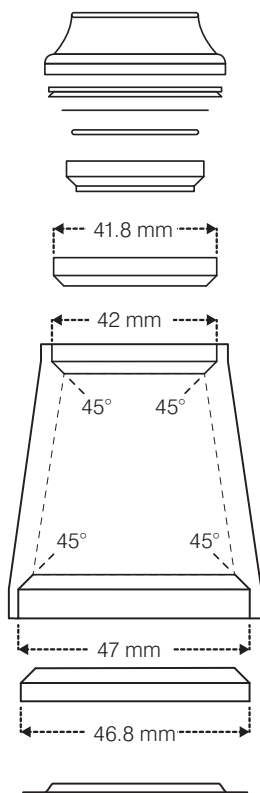

### Specifications

Type	Integrated, Angular contact
Material	7075 CNC Alu Cups, Carbon top Spacer, Alu Top Cap
Upper Steerer Diameter	1 1/8"
Lower Steerer Diameter	1 1/4"
Upper External Angle	45°
Frame Inside Upper Diameter	42 mm (+/- 0.1 mm)
Lower External Angle	45°
Frame Inside Lower Diameter	47 mm (+/- 0.1 mm)
Bearings	Annular
Stack Height	16,8 mm
SHIS Code	IS42/28,6   IS47/33"
Color	Carbon
Weight	90 g
Item no.	252719

## Light'in Al 1-1/8" – 1-1/8"

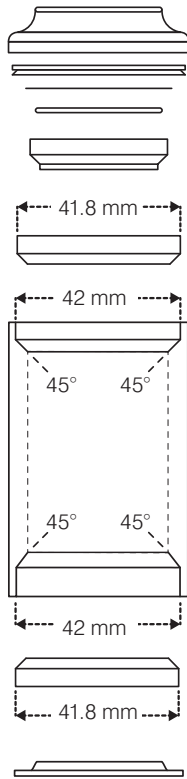


### Specifications

Type	Integrated, Angular contact
Material	7075 CNC Alu
Upper Steerer Diameter	1 1/8"
Lower Steerer Diameter	1 1/8"
Upper External Angle	45°
Frame Inside Upper Diameter	42 mm (+/- 0.1 mm)
Lower External Angle	45°
Frame Inside Lower Diameter	42 mm (+/- 0.1 mm)
Bearings	Annular
Stack Height	9,9 mm
SHIS Code	IS42/28,6   IS42/30"
Color	Black
Weight	90 g
Item no.	252764

## Raz Carbon 1-1/8" – 1.5"


TAPERED

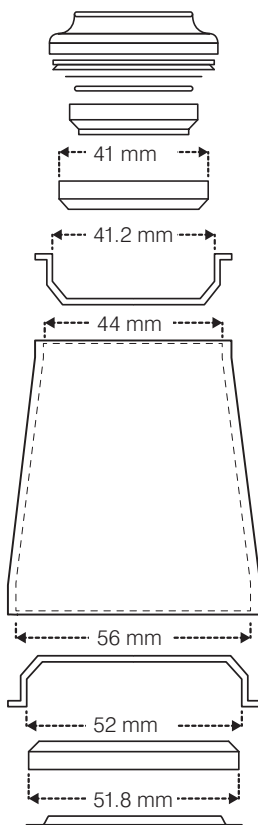

### Specifications

Type	Semi integrated
Material	7075 CNC Alu Cups, Carbon top Spacer, Alu Top Cap
Upper Steerer Diameter	1 1/8"
Lower Steerer Diameter	1.5"
Frame Inside Upper Diameter	44 mm (+/- 0.1 mm)
Frame Inside Lower Diameter	56 mm (+/- 0.1 mm)
Bearings	Sealed
Stack Height	13,6 mm
SHIS Code	ZS44/28.6   ZS56/30"
Color	Carbon
Weight	90 g
Item no.	252774


## Raz Steel 1-1/8" – 1-1/8"

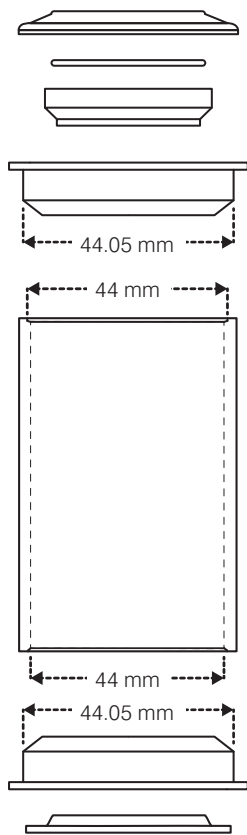

### Specifications

Type	Semi integrated
Material	Steel, Alu Top Cap
Upper Steerer Diameter	1 1/8"
Lower Steerer Diameter	1 1/8"
Frame Inside Upper Diameter	44 mm (+/- 0.1 mm)
Frame Inside Lower Diameter	44 mm (+/- 0.1 mm)
Bearings	Cartridge
Stack Height	10,4 mm
SHIS Code	ZS44/28.6   ZS44/30"
Color	Black
Weight	98 g
Item no.	252776


## O'Light LX 1-1/8" – 1-1/8"

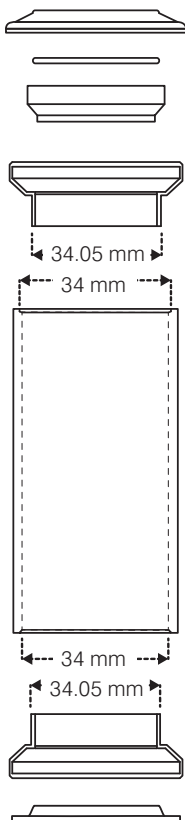

### Specifications

Type	Cups
Material	7075 CNC Alu Cups, Alu Top Cap
Upper Steerer Diameter	1 1/8"
Lower Steerer Diameter	1 1/8"
Frame Inside Upper Diameter	34 mm (+/- 0.1 mm)
Frame Inside Lower Diameter	34 mm (+/- 0.1 mm)
Bearings	Annular
Stack Height	27,3 mm
SHIS Code	EC34/28.6   EC34/30"
Color	Black
Weight	113 g
Item no.	252706


## O'Light ST 1-1/8" – 1-1/8"

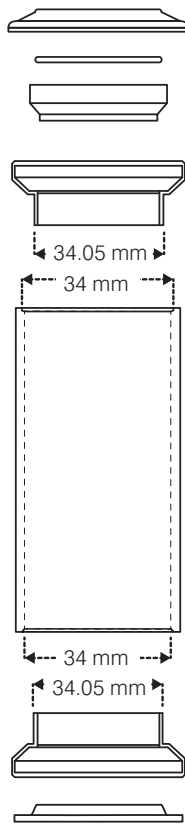

### Specifications

Type	Cups
Material	Steel, Alu Top Cap
Upper Steerer Diameter	1 1/8"
Lower Steerer Diameter	1 1/8"
Frame Inside Upper Diameter	34 mm (+/- 0.1 mm)
Frame Inside Lower Diameter	34 mm (+/- 0.1 mm)
Bearings	Cartridge
Stack Height	27,5 mm
SHIS Code	EC34/28.6   EC34/30"
Color	Black
Weight	183 g
Item no.	252775

## A9 ST 1" – 1"

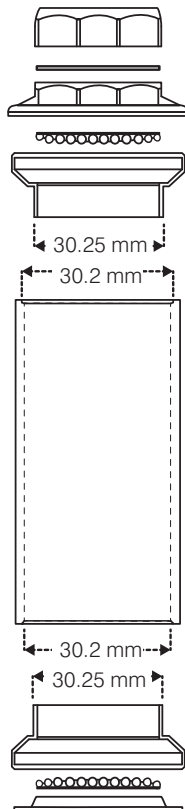

### Specifications

Type	Threaded (BSC)
Material	Steel
Upper Steerer Diameter	1"
Lower Steerer Diameter	1"
Frame Inside Upper Diameter	30,2 mm (+/- 0.05 mm)
Frame Inside Lower Diameter	30,2 mm (+/- 0.05 mm)
Bearings	Standard
Stack Height	39,4 mm
SHIS Code	EC27/25,4   EC27/26"
Color	Black
Weight	140 g
Item no.	252709